



# DESIGNLIGHT

SCANDINAVIAN AB

## LINJÄR HIGH BAY 230W

E-NR: 72 177 02


ART NR: LHB-230

EFFEKT POWER	MATERIAL MATERIAL	KELVIN KELVIN	USEFUL LUMEN (LM)	ARMATURFÄRG LUMINAIRE COLOUR
230W	ALUMINIUM	4000K	40710	SVART/BLACK

CE, RoHS  




 **LIFETIME**  
L80B50: 159000H

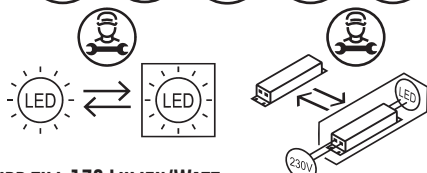

- EFFEKTIVITET UPP TILL 170 LUMEN/WATT
- DRIVDON TÄND/SLÄCK
- GJUTET ALUMINIUMHUS MED AKZO NOBEL PULVERLACK




POWER  
**230**  
WATT

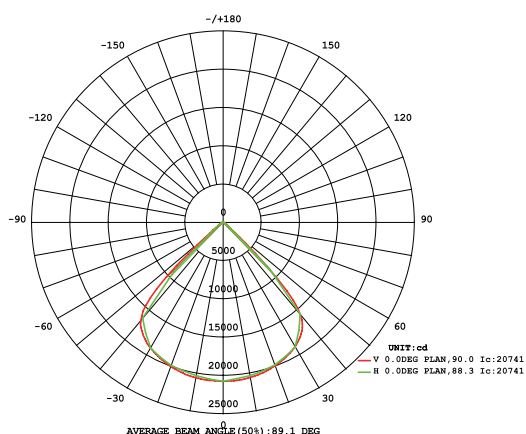

## ANTAL ARMATURER PER SÄKRING

B10	B16	C10	C16	D10	D16
1	2	2	4	5	9

### Mått/Dimension

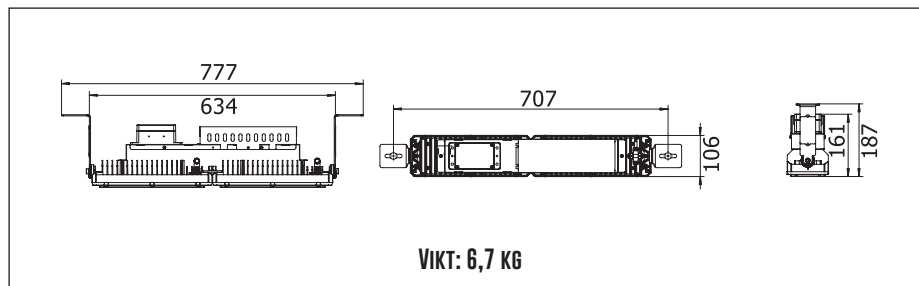

1.900K	2.700-3.000K	4.000-4.500K	4.800K	5.000-5.000K	7.000-7.500K	10.000K
STEARINLJUS CANDLE	VARMVIT WARM WHITE	NATURLIG VIT NATURAL WHITE	SOLLJUS DIRECT SUN	VITT DAGSLJUS DAY WHITE	KALLVIT COOL WHITE	BLÅ HIMMEL BLUE SKY

PRODUKTEN INNEHÅLLER LJUSKÄLLA MED ENERGI-MÄRKNING KLASS B.

### SÄKERHET:

- 1 Installation och underhåll ska utföras av behörig installatör.
- 2 Den externa kabeln/sladden på denna armatur kan inte bytas ut. Om sladden är skadad måste armaturen kasseras.
- 3 Jord ska vara väl ansluten.
- 4 Se till att armaturen är kopplad med rätt märkspänning.
- 5 Använd inte kemiska eller frätande medel för att rengöra armaturen.
- 6 Minsta avstånd mellan armatur och upplyst objekt ska vara minst 0,3 meter.



### SAFETY:

- 1 Installation and maintenance must be performed by qualified person.
- 2 The external flexible cable or cord of the luminaire cannot be replaced. If the cord is damaged, the luminaire shall be destroyed.
- 3 Ground wire must be well connected.
- 4 Please make sure the lamp is working with correct input voltage.
- 5 Do not use chemicals or corrosive cleaner to clean the fixture.
- 6 The minimum distance from lighted objects to luminaires shall be kept at least 0.3 m.



**DESIGNLIGHT**  
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · TOFFELVÄGEN 1 · 342 60 MOHEDA

KUNDCENTER: TELEFON 0472-716 10 · FAX 0472-716 09 · INFO@DESIGNLIGHT.NU · WWW.DESIGNLIGHT.NU