



DESIGNLIGHT

SCANDINAVIAN AB

STRÅLKASTARE, ELLY EBB

E-NR: 77 706 35

ART NR: EBB-50

EFFEKT POWER	MATERIAL MATERIAL	KELVIN KELVIN	ÅRMATURFÄRG ARMATURE COLOR	ANSLUTNING CONNECTION	LUMEN LUMEN
50W	ALUMINIUM	4000K	SVART/BLACK	230V	5000-5500LM

ROHS CE

IP65

230
VOLT




120°


CRI
>70

-20
+50°


LIFETIME
L70B50: 54.000H



- EFFEKTIVITET UPP TILL 110 LUMEN/WATT
- GJUTET ALUMINIUMHUS MED AKZO NOBEL PULVERLACK
- KABELLÄNGD: 0,8 METER

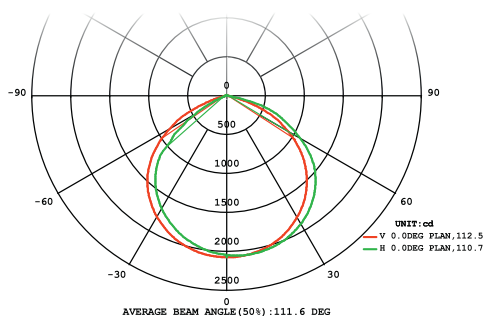

Mått/Dimension

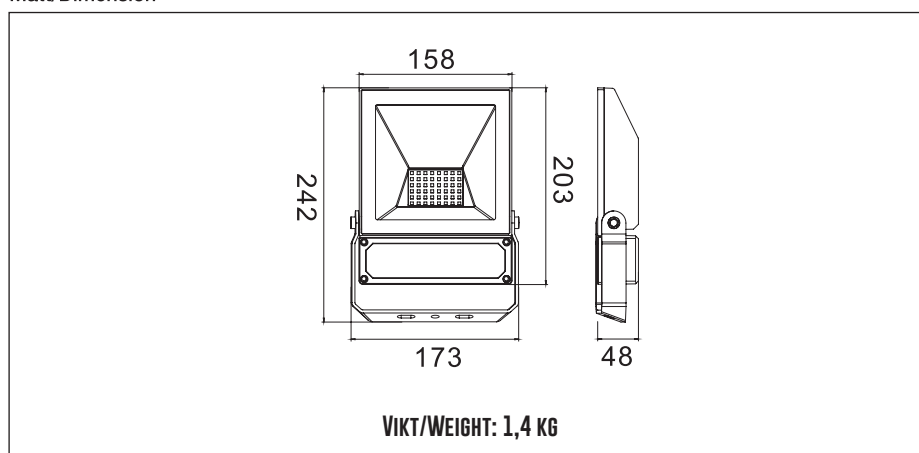

1.900K STEARINLJUS CANDLE	2.700-3.000K VÄRMVIT WARM WHITE	4.000-4.500K NATURLIG VIT NATURAL WHITE	4.800K SOLLJUS DIRECT SUN	5.000-5.000K VITT DAGSLJUS DAY WHITE	7.000-7.500K KALLVIT COOL WHITE	10.000K BLÅ HIMMEL BLUE SKY
---------------------------------	---------------------------------------	---	---------------------------------	--	---------------------------------------	-----------------------------------


LÄS MER OM VÅRA GARANTIVILLKOR PÅ WWW.DESIGNLIGHT.NU READ MORE ABOUT OUR WARRANTY CONDITIONS AT: WWW.DESIGNLIGHT.NU

DESIGNLIGHT
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · TOFFELVÄGEN 1 · SE-342 60 MOHEDA · SWEDEN
TELEFON/PHONE +46 (0)472-716 10 · INFO@DESIGNLIGHT.NU · WWW.DESIGNLIGHT.NU



Designlight Scandinavian AB
EBB-50



50
kWh/1000h



2019/2015

⚠ SÄKERHET:

- 1 Installation och underhåll ska utföras av behörig installatör.
- 2 Den externa kabeln/sladden på denna armatur kan inte bytas ut. Om sladden är skadad måste armaturen kasseras.
- 3 Jord ska vara väl ansluten.
- 4 Se till att armaturen är kopplad med rätt märkspänning.
- 5 Använd inte kemiska eller frätande medel för att rengöra armaturen.
- 6 Minsta avstånd mellan armatur och upplyst objekt ska vara minst 0,3 meter.



⚠ SAFETY:

- 1 Installation and maintenance must be performed by qualified person.
- 2 The external flexible cable or cord of the luminaire cannot be replaced. If the cord is damaged, the luminaire shall be destroyed.
- 3 Ground wire must be well connected.
- 4 Please make sure the lamp is working with correct input voltage.
- 5 Do not use chemicals or corrosive cleaner to clean the fixture.
- 6 The minimum distance from lighted objects to luminaires shall be kept at least 0.3 m.

